
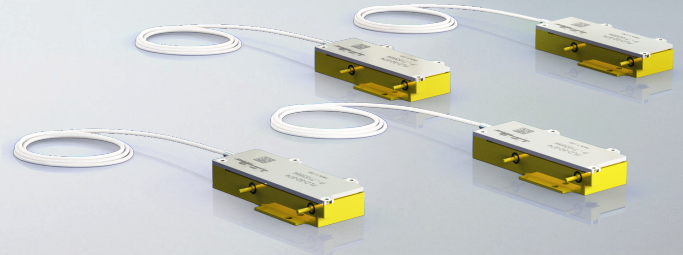
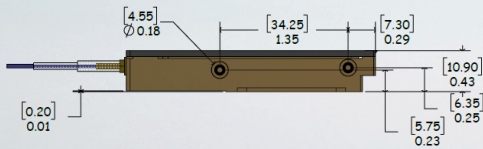


PLD-92-975-WS: 975 nm 55 W

Wavelength-stabilized Packaged Diodes

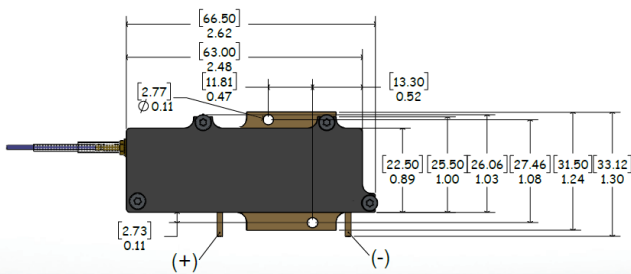

FEATURES

- ▶ 975 nm center wavelength
- ▶ Tight +/-1.0 nm wavelength control
- ▶ 55 W maximum output power at 12 Amperes
- ▶ Compact fiber-coupled package
- ▶ Minimal cooling requirements



APPLICATIONS

- ▶ Fiber Laser Pumping

IPG Photonics' line of wavelength-stabilized fiber-coupled packaged diodes utilize IPG's own volume Bragg grating components to provide unmatched performance from a compact, single-emitter diode footprint featuring high reliability and minimal cooling requirements. The PLD-92-975-WS provides a high brightness 55 W fiber-coupled power out of a 110 μm diameter core.

At IPG, we manufacture to rigorous telecom-grade standards in the world's largest high power diode fab. Each die is individually qualified, which sets IPG apart from alternative industrial pump products using short-lived diode bars and bar-stack technologies.

PLD-92-975-WS: 975 nm 55 W

Wavelength-stabilized Packaged Diodes

Optical and Electrical Characteristics*

Center Wavelength, nm	975
Center Wavelength Tolerance, nm	±1
Output Power, W	55
Wavelength Shift with Current, nm/A	<0.01
Power Shift with Current, W/A	<5
Power in Band, %	>95
Threshold Current (I_{TH}), A	1
Operating Current (I_{OP}), A	12
Forward Voltage, V	<10
Recommended Case Temperature, °C	25

* Typical performance data measured at 12 A, 25°C.

Fiber Characteristics



Fiber Core Diameter, μm	110
Fiber Cladding Diameter, μm	125
Fiber Buffer Diameter, μm	250
Beam Numerical Aperture (90% power)	<0.18
Fiber Length, m	1.9
Minimum Fiber Bend Radius, mm	30

Maximum Ratings

Operating Current (I_{OP}), A	14
Reverse Voltage, V	2.5
Case Temperature, °C	5 - 70
Storage Temperature, °C	-20 to 60
Lead Soldering Temperature (10 s max) °C	300
Relative Humidity, %	85



+1 (508) 373-1100;
IPGPhotonics.com/contact
www.ipgphotonics.com



Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2024 IPG Photonics Corporation. All rights reserved.