




ULPP-30-1-30-R

Ultraviolet Picosecond Hybrid Laser

PRELIMINARY

30 W, 1-5 ps

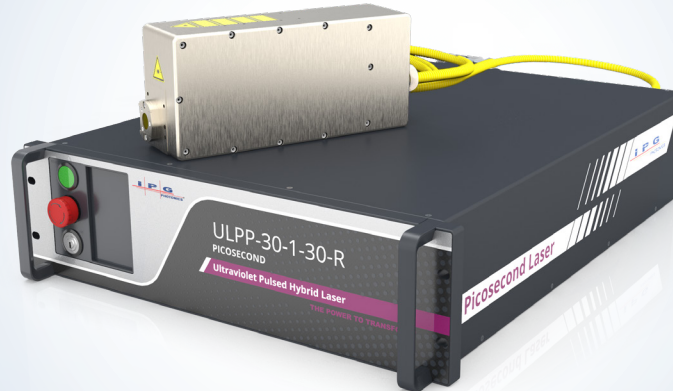

Applications

- ▶ Precision Micromachining
- ▶ Microdrilling
- ▶ Thin Film Ablation
- ▶ Photomask Cutting
- ▶ Medical Device Manufacturing
- ▶ LED Dicing
- ▶ Solar Cell Structuring
- ▶ Fine Tube Cutting
- ▶ Glass, Silicon, Ceramics, Polymer and Composite Material Processing



Features

- ▶ Wavelength 343 nm
- ▶ Output Power up to 30 W
- ▶ Pulse Energy up to 30 μ J
- ▶ High Peak Power up to 30 MW
- ▶ Pulse Duration Options 1-5 ps
- ▶ Repetition Rate up to 2 MHz
- ▶ Low-maintenance
- ▶ Rugged Design

IPG Photonics NEW **ULPP-30-1-30** ultraviolet hybrid-fiber picosecond laser provide high peak power with scalable average output power of 30 W and customer selected pulse durations in the range of 1 to 5 ps at full operational repetition rate range of 50-2000 kHz.

The fiber design allows for the adjustment of peak power and/or pulse repetition rate without affecting any of the output beam parameters. IPG's novel fiber laser is much more efficient, compact and easy to integrate into OEM equipment than conventional lasers now on the market. It is ideal for applications in precision micromachining.

The excellent beam quality, ultrashort pulse duration and high pulse energy combine to provide peak power densities suitable for micromachining virtually any material: metal, glass, ceramic, silicon, plastics. The ultrashort pulse duration and ultraviolet wavelength result in a very small heat affected zone.

ULPP-30-1-30-R

Ultraviolet Picosecond Hybrid Laser


Optical Characteristics*

Wavelength, nm	343
Max. Average Power, W	Up to 30
Pulse Energy, μ J	Up to 30
Pulse Duration, ps	1-5
Peak Power, MW	Up to 30
Repetition Rate, kHz	50-2000
Beam Quality, M^2	<1.3

*Customer can select models within specified maximum power, maximum pulse energy and pulse durations in 1 to 5 ps range. Shorter pulse durations and pulse energies are available upon request.

General Characteristics

Control Unit Dimensions (W x D x H), mm	448x580x133
Optical Head Dimensions (W x D x H), mm	75x260x118
Cooling	Water-cooled
Supply Voltage, VAC	100-240, 50/60 Hz
Power Consumption, W	<1000 W

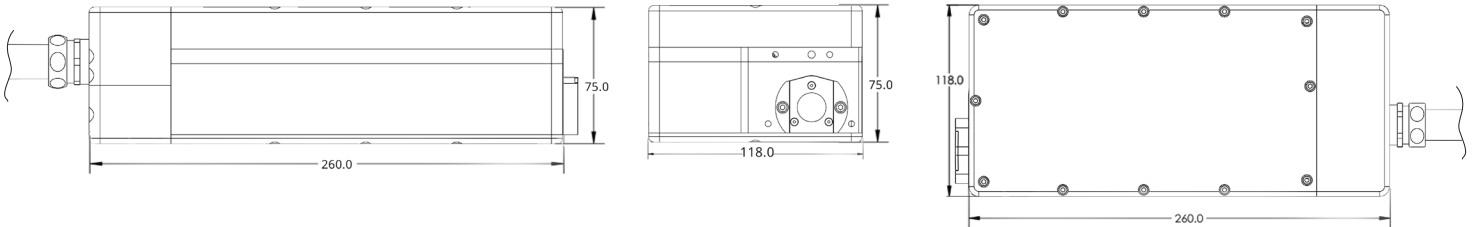

+1 (508) 373-1100; sales.us@ipgphotonics.com
 +49 2736 44200; sales.europe@ipgphotonics.com (European Inquiries)

www.ipgphotonics.com

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2020 IPG Photonics Corporation. All rights reserved. **Patents Pending.**

MAX. AVERAGE OUTPUT POWER: 60 W
 MAX. PEAK OUTPUT POWER: 60 MW
 PULSE DURATION: 1-5 ps
 PULSE REPETITION RATE: 50-2000 kHz
 WAVELENGTH RANGE: 330-1200 nm

DANGER - INVISIBLE LASER RADIATION AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION CLASS 4 LASER PRODUCT

IEC 60825-1:2014

The Power to Transform®