




DLM 100-200

Air-cooled Diode Laser Module

NEW PRODUCT

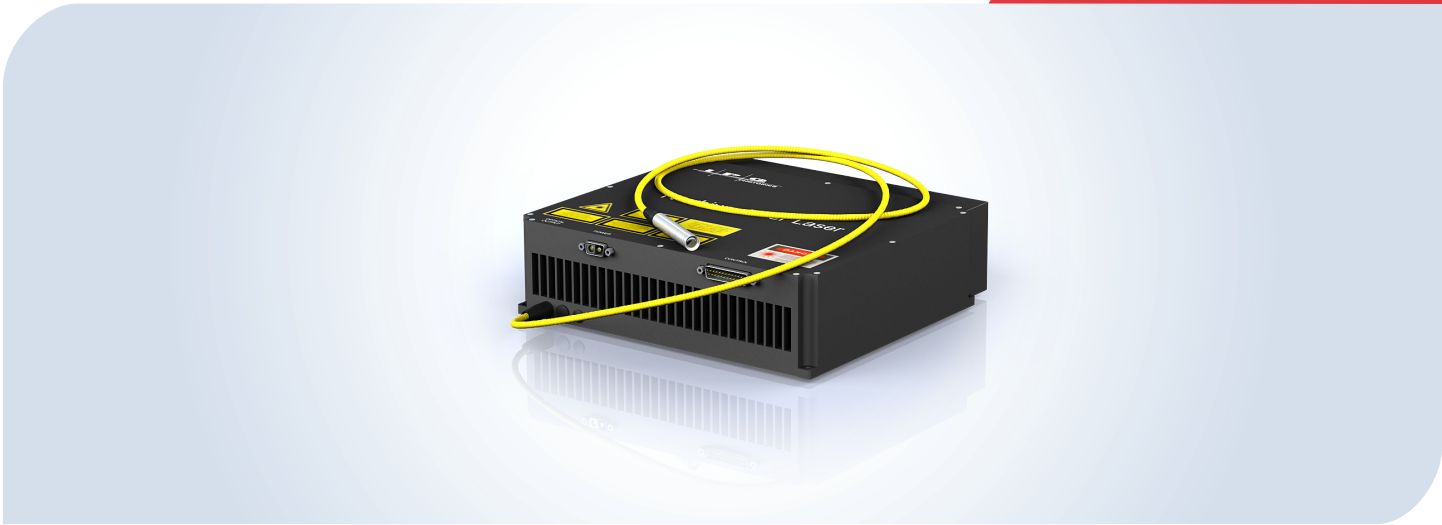

Applications

- ▶ Optical Pumping
- ▶ Soldering
- ▶ Plastics Welding
- ▶ Materials Processing
- ▶ FPD Bonding
- ▶ Medical

Features

- ▶ Output Power up to 200 W
- ▶ 915, 940, 960 and 970 nm Central Wavelengths
- ▶ Narrow Emission Linewidth with Wavelength Stabilization Option
- ▶ 5 mm Collimator and Bare Fiber Termination Options
- ▶ Red Guide Laser Option
- ▶ Compact Size

IPG's Diode Laser Modules are turnkey air-cooled diode systems with integrated driver electronics and cooling features. With output powers of 100 or 200 W, these compact modules are multi-mode with center wavelength options of 915, 940, 960 and 970 nm. The air-cooled DLM-series is available with a range of output options including collimator or bare fiber termination. A red guide laser option is also available.


IPG's diode modules are attractively priced for OEMs and integrators and serve a wide range of medical, materials processing and laser pumping applications.

DLM 100-200

Air-cooled Diode Laser Module

Optical Characteristics	DLM-100	DLM-200
Central Wavelength, nm	915, 940, 960, 970	
Linewidth FWHM, nm	5	
Mode of Operation	CW/Modulated	
Max. Output Power, W	100	200
Max. Modulation Frequency, kHz	50	
Power Stability, %	±1	
Standard Fiber Termination	5 mm Collimator	
Bare Fiber Termination Option	Multimode, 200 μm	

General Characteristics		
Module Dimensions (W × D × H), mm	270 × 60 × 220	
Cooling	Air-cooled	
Control Interface	DB-25	
Max. Supply Voltage, VDC	24	
Max. Power Consumption, W	250	500

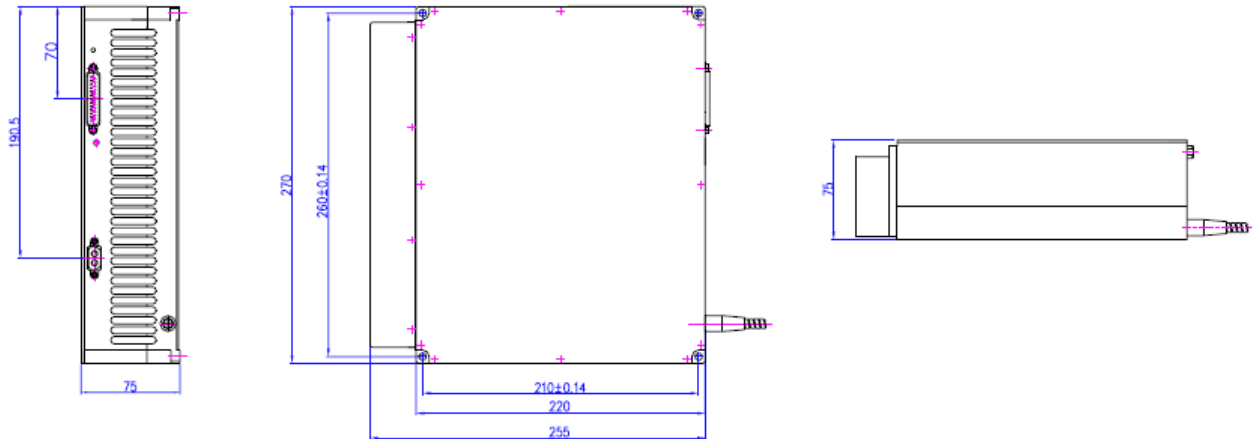

+1 (508) 373-1100
 sales.us@ipgphotonics.com
www.ipgphotonics.com

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2015-18 IPG Photonics Corporation. All rights reserved.

MAXIMUM OUTPUT POWER: 400 W
 WAVELENGTH RANGE: 900-980 nm

DANGER - INVISIBLE LASER
 RADIATION AVOID EYE OR SKIN
 EXPOSURE TO DIRECT OR
 SCATTERED RADIATION
 CLASS 4 LASER PRODUCT
 IEC 60825-1:2014

The Power to Transform®