



YLS-2300/23000-QCW

High Power Quasi-CW Ytterbium Fiber Laser

NEW PRODUCT



Applications

- ▶ 2D/3D Thin and Thick Cutting
- ▶ Processing Copper, Brass and Aluminum
- ▶ Welding
- ▶ Surface Treatment
- ▶ Drilling



Features

- ▶ CW Output Power 2.3 kW @ Workpiece
- ▶ Peak Power: 23 kW
- ▶ Pulse Duration: 0.2-10 ms
- ▶ Maintenance-free Operation
- ▶ Modulation up to 2 kHz
- ▶ Cost-effective Cutting System
- ▶ Record Reliability
- ▶ Compact, Rugged Design



IPG Photonics has expanded its QCW fiber laser series with new higher power models, including the **new YLS-2300/23000-QCW** laser. With a peak power of 23 kW, pulse durations of 0.2-10 ms and a maximum pulse energy of 230 J, the newest offering is IPG's QCW product family is well suited to drilling and cutting applications within the aerospace industry, where percussion drilling, trepanning and fine cut features are often required.

Available in compact form factor, with very low price per watt, IPG's QCW fiber lasers are substantially more cost-effective than conventional YAG lasers due to >30% wall-plug efficiency and maintenance-free operation. The QCW lasers are available for requalifying existing lamp-pumped processes.

YLS-2300/23000-QCW

High Power Quasi-CW Ytterbium Fiber Laser


Optical Characteristics

Wavelength, nm	1070 ±5
Mode of Operation	Pulsed/CW
Repetition Rate, kHz	2
Average Power, W	2300
Power Tunability, %	10-100
Peak Power, W	23000
Max. Pulse Energy, J	230
Pulse Duration, ms	0.2-10
Power Stability, %	±2

Beam Parameter Product, mm × mrad
 15 @ 300 μm feeding fiber
 4.2 @ 100 μm feeding fiber

General Characteristics

Cabinet Dimensions (W × D × H), mm	856 × 806 × 206
Weight, kg	380
Cooling	Water-cooled
Supply Voltage, VAC	400-480 3-phase, 50/60 Hz
Power Consumption, kW	<9

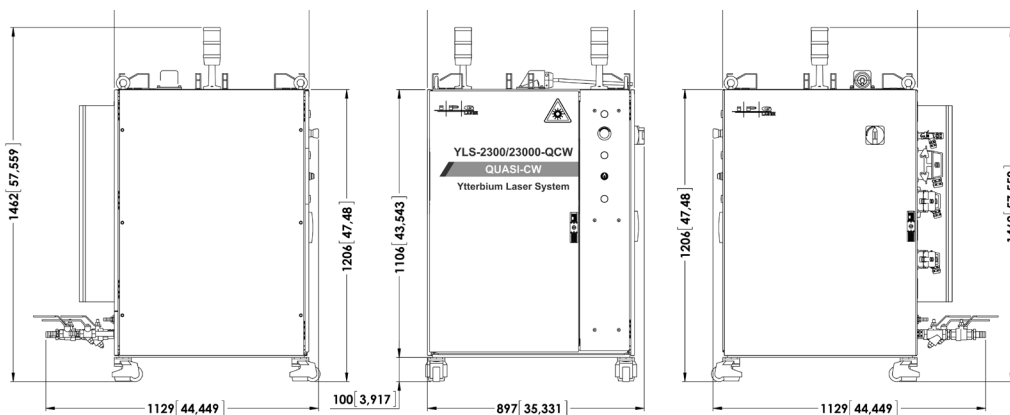

+1 (508) 373-1100; sales.us@ipgphotonics.com
 +49 2736 44200; sales.europe@ipgphotonics.com (European Inquiries)

www.ipgphotonics.com

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2015-18 IPG Photonics Corporation. All rights reserved.

MAX. AVERAGE OUTPUT POWER: 5,000 W
 MAX. PEAK OUTPUT POWER: 5,000 W
 PULSE DURATION: 0.2-10 ms
 PULSE REPETITION RATE: 0-2000 kHz
 WAVELENGTH RANGE: 900-1200 nm

WARNING
 DANGER - INVISIBLE LASER
 RADIATION AVOID EYE OR SKIN
 EXPOSURE TO DIRECT OR
 SCATTERED RADIATION
 CLASS 4 LASER PRODUCT
 IEC 60825-1:2014

The Power to Transform®