



# DLT Series

## Tunable Ultra-Narrow Band Diode Lasers

NEW PRODUCT



### Applications

- ▶ Spin Exchange Optical Pumping
- ▶ Atomic Magnetometry
- ▶ Magnetic Resonance Imaging
- ▶ Optically Pumped Metastable Rare Gas Laser
- ▶ Neutron Spin Filters
- ▶ Diode Pumped Alkali Laser



### Features

- ▶ Ultra-narrow Linewidth of <math><10\text{ GHz}</math> at High Power
- ▶ High Pumping Efficiency of Rb, Cs & K with Low Gas Pressure for Highest Spin Exchange Rates
- ▶ Tunable Wavelength from 20 to 60  $\mu\text{m}$ , 50-150  $\mu\text{m}$
- ▶ Tunable Range of 300  $\mu\text{m}$  for Perfect Wavelength Matching
- ▶ Operational Wavelength Stability within 2.5 GHz
- ▶ Systems Available for D1 and D2 Transitions of Rb, Cs, K and NIR Transitions of Ar, Kr and Xe
- ▶ Minimum Thermal Load on Gas Cell

Power up to 100 W



IPG's DLT Series tunable diode lasers have been developed for spin-exchange optical pumping, diode pumped alkali laser and rare gas lasers applications requiring high power within an extremely narrow absorption resonance of alkali metal atoms (Rubidium, Potassium and Cesium) and rare gases (Xenon, Argon and Krypton). A unique proprietary volume Bragg grating design enables ultra-narrow laser linewidth. The laser system delivers 35 to 100 W output power with linewidth and wavelength tuning options.

Polarization options are random, linear and circular. External beam expander/polarizer allows for up to 3 inch beam diameter with circular polarization. Hybrid laser systems provide several wavelengths for simultaneous pumping of several alkali metal atoms (e.g. Rb/Cs or Rb/K). Narrowband laser system for large area Raman spectroscopy for food quality control application is also available at 785 nm.

# DLT Series

## Tunable Ultra-Narrow Band Diode Lasers

### Optical Characteristics

Central Wavelength*, nm	770, 780, 794.7, 785, 811.3, 811.5, 852, 894.3 and 904.5
Nominal Output Power, W	35, 70, 100
Spectral Bandwidth FWHM, GHz	<10
Tuning Range, pm	300
Spectral Stability**, GHz	±2.5
Amplitude Stability**, %	±0.5
Laser Beam Delivery	Optical Fiber, Polarization Maintaining Fiber Rod, Free Space

\*Stable wavelength at different power levels

\*\*Over 4 hours of operation


### General Characteristics

35 & 70 Watt


100 Watt

Operating Temperature, °C	15-25 (non-condensing)
Storage Temperature, °C	10-50 (non-condensing)
Laser Head Dimensions, W × D × H, mm	203 × 711 × 101
	203 × 914 × 101


The complete laser system contains power supply, temperature controller, chiller for water cooling, as well as an intuitive software interface. The fiber delivery with single fibers, fiber rods or fiber bundles, combiners, beam expanders, beam attenuators are optional.

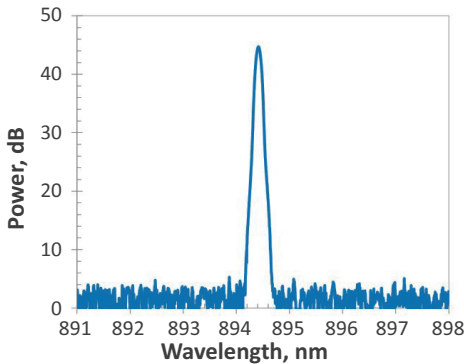

Narrowband Laser for Pumping of D1 Line of Cs with 40 dB Noise Suppression

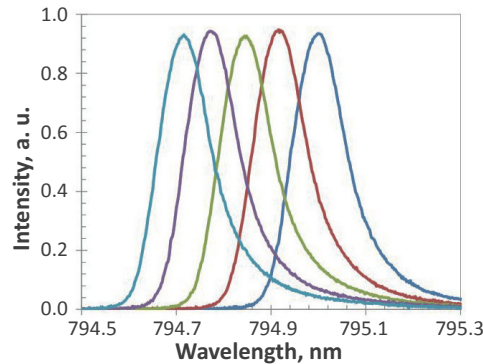

Wavelength Tunability of Narrowband Laser for Pumping D1 Line of Rb

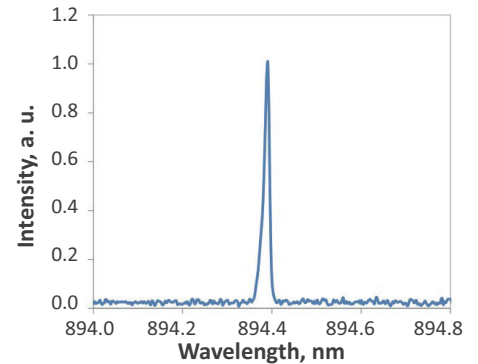

Narrowband Laser for Pumping of D1 line of Cs with 15 pm Linewidth

sales.us@ipgphotonics.com

[www.ipgphotonics.com](http://www.ipgphotonics.com)

**Legal notices:** All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2012-2018 IPG Photonics Corporation. All rights reserved. Protected by US patents 5,541,948; 6,960,486; 7,548,571 and applicable licenses.

MAX. AVERAGE OUTPUT POWER: 200 W  
WAVELENGTH RANGE: 760-910 nm

**DANGER - INVISIBLE LASER  
 RADIATION AVOID EYE OR SKIN  
 EXPOSURE TO DIRECT OR  
 SCATTERED RADIATION  
 CLASS 4 LASER PRODUCT**

IEC 60825-1:2014

**The Power to Transform®**