



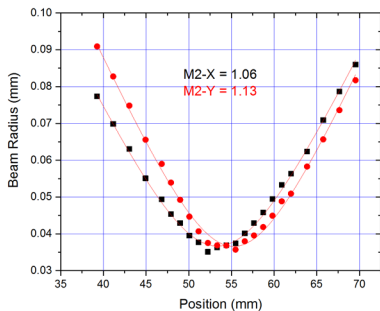

The World's First 1 kW Green Single-mode Laser!

GLPN-532-QCW High Power Ultra-high Frequency Pulses

NEW PRODUCT

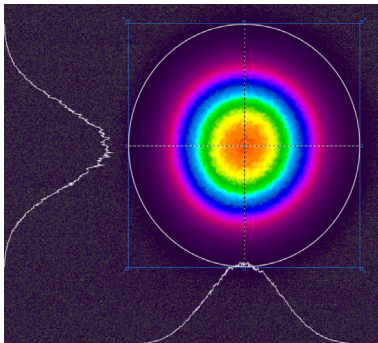

Output Power up to 1000 Watt



Applications

- ▶ Welding and Cutting of Highly-reflective Metals
- ▶ Semiconductor Wafer Annealing
- ▶ Solar Cell Manufacturing
- ▶ Laser Shows
- ▶ Laser Projectors

Features

- ▶ Wavelength 532 nm
- ▶ Output Power up to 1 kW
- ▶ Beam Quality $M^2 < 1.2$
- ▶ Power Stability $\pm 2\%$
- ▶ Wall Plug Efficiency up to 25%
- ▶ Linear Polarization $> 100:1$
- ▶ Super Compact Head

IPG Photonics' NEW GLPN-532-QCW and VLR-532 high power green fiber laser provide ground-breaking maximum average power up to 1000 W in a perfectly single-mode output beam. These lasers take advantage of high repetition rate operation mode to allow for a high-efficiency super compact optical head. The lasers are offered as both highly cost-effective compact OEM modules and user-friendly 19" rack-mounted consoles. The optical head is connected to a water-cooled, highly-efficient and reliable fiber amplifier, pioneered by IPG. The result is a rugged, industrial-grade, high-power green fiber laser with unmatched performance and remarkable wallplug efficiency.


GLPN-532-QCW High Power Green Single-mode Fiber Lasers

Optical Characteristics	GLPN-100	GLPN-200	GLPN-500	GLPN-1000
Wavelength, nm	532			
Mode of Operation	Pulsed/QCW			
Repetition Rate, MHz	~25	~50	~125	~250
Average Power, W	100	200	500	1000
Power Tunability, %	1-100			
Pulse Duration, ns	~1.2			
Power Stability*, %	±2			
Polarization	Linear, >100:1			
Beam Quality, M ²	<1.2			

* Over 8 hours, T= const.

General Characteristics				
Optical Head (W × D × H), mm	114 × 238 × 60			
Module Dimensions (W × D × H), mm	Air-cooled* 294 × 491 × 149		Water-cooled 332 × 527 × 71	
Console Dimensions (W × D × H), mm	Air-cooled* 448 × 533 × 177		Water-cooled 448 × 678 × 176	
Module Supply Voltage, VDC	48 VDC		56 VDC	
Console Supply Voltage, VAC	100-120 VAC, 50-60 Hz		200-240 VAC, 50-60 Hz	
Power Consumption, W	580	950	2100	3900

* Water-cooled 100 W modules and 3U 19" rack-mounted consoles are available upon request.

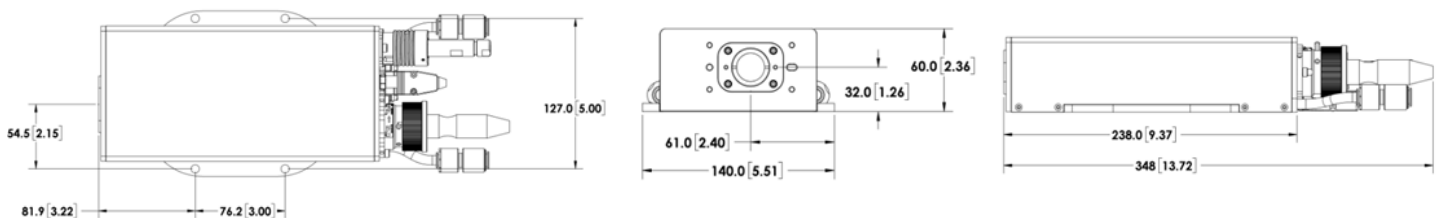

+1 (508) 373-1100; sales.us@ipgphotonics.com
+49 2736 44200; sales.europe@ipgphotonics.com (European Inquiries)

www.ipgphotonics.com

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2020 IPG Photonics Corporation. All rights reserved.

MAX. AVERAGE OUTPUT POWER: 2000 W
MAX. PEAK OUTPUT POWER: 5 kW
PULSE DURATION: ~1.5 ns
PULSE REPETITION RATE: 2-150 MHz
WAVELENGTH RANGE: 532, 1064 nm

DANGER - INVISIBLE LASER
RADIATION AVOID EYE OR SKIN
EXPOSURE TO DIRECT OR
SCATTERED RADIATION
CLASS 4 LASER PRODUCT
IEC 60825-1:2014

The Power to Transform®