




CLPF-2500-SC IDFG Series

Femtosecond Ultrabroadband Vis-to-IR Source

NEW PRODUCT

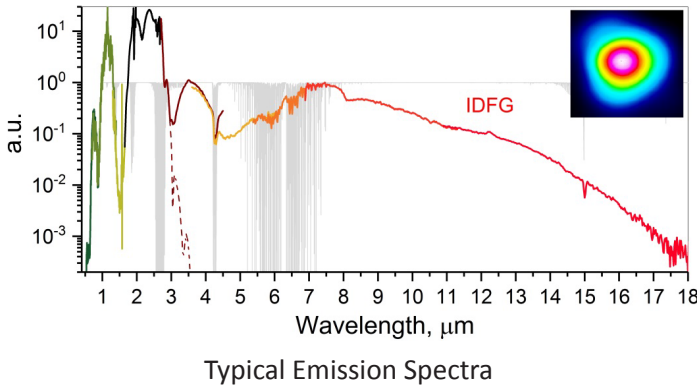

IPG Photonics introduces an important addition to the family of middle-IR femtosecond lasers. NEW CLPF oscillators/amplifiers in combination with the supercontinuum spectral extension module (**CLPF-2500-SC Series**) provide access to the whole Vis-to-IR spectral range (400 nm to 18 μm) with record-breaking Watt-level average power.

As an option, CLPF-2500-SC series can be converted to CLPF-2500-FC optical frequency comb with the addition of pulse repetition frequency and carrier envelope offset frequency stabilization (complete kit available). Optical lock to a stabilized 1064 nm laser and automated pulse repetition frequency tuning are offered as options for dual comb spectroscopy applications.

Please discuss your needs with an IPG Photonics representative.

Applications

- ▶ FTIR Spectroscopy
- ▶ Dual Comb Spectroscopy
- ▶ Multi-photon Imaging
- ▶ Metrology
- ▶ Biomedical Applications
- ▶ High-harmonic Generation
- ▶ Mid-IR Frequency Combs
- ▶ Supercontinuum Generation

Features

- ▶ High Spatial Coherence
- ▶ High Brightness
- ▶ Beam Quality $M^2 < 1.5$
- ▶ TEM₀₀
- ▶ Power and Energy Amplifiers
- ▶ DFG Wavelength Extension
- ▶ High Optical Power (up to):
 - Near-IR – 0.2 W
 - MIR – 4 W
 - LWIR – 10 mW
- ▶ Fully Stabilized Frequency Comb Option


CLPF-2500-SC IDFG Series

Femtosecond Ultrabroadband Vis-to-IR Source

Optical Characteristics	CLPF-2500-FC IDFG
Central Wavelength, nm	2500
Spectral Bandwidth (-20 dB), nm	13000
Average Power, W	2
Pulse Energy, nJ	25
Repetition Rate*, MHz	80
Typ. Pulse Duration, fs	24
Long Term Power Stability**, %	1
Polarization	Linear, >100:1
Output Beam Mode, M ²	≤1.5
Beam Diameter (FW, 1/e ²), mm	1.5 ±0.5
Beam Divergence, mrad	<0.5
Warm up Time, min	15-60

* Custom repetition rates are available upon request.
 ** After 1 hour warm up, over 2 hours, ambient T ±2°C

General Characteristics	IPG Photonics Erbium CW Fiber Laser
Integrated Pump Laser	IPG Photonics Erbium CW Fiber Laser
Pump Laser Dimensions (W × D × H), mm	448 × 403 × 132
Optical Head Dimensions (W × D × H), mm	152 × 433 × 122
Supply Voltage 50-60 Hz, VAC	110-240
Power Consumption, W	200 Typ.

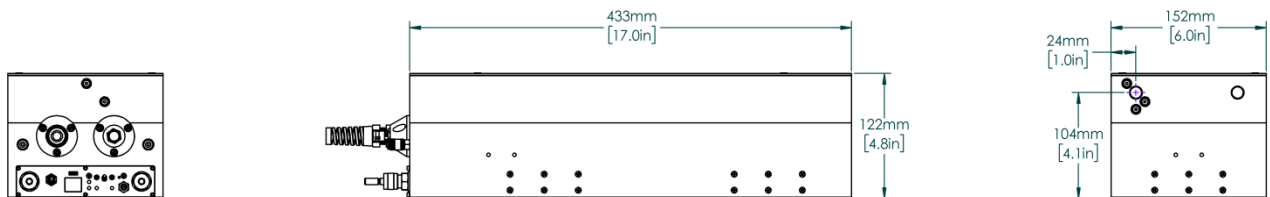

+1 (205) 307-6677
 sales.us@ipgphotonics.com

www.ipgphotonics.com/midIR

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2012-2019 IPG Photonics Corporation. All rights reserved. Protected by US patents 5,541,948; 6,960,486; 7,548,571 and applicable licenses.

MAX. AVERAGE OUTPUT POWER: 40 W
 MAX. PEAK OUTPUT POWER: 1 GW
 PULSE DURATION: 30 fs
 PULSE REPETITION RATE: <500 kHz
 WAVELENGTH RANGE: 2000-2700 nm

DANGER - INVISIBLE LASER RADIATION
 AVOID EYE OR SKIN EXPOSURE TO DIRECT OR SCATTERED RADIATION
 CLASS 4 LASER PRODUCT
 IEC 60825-1:2014

The Power to Transform®