

PLD-212-HPP: 970 nm, 200 W

High Peak Power Fiber-coupled Diode Lasers



Applications

- ▶ Direct Diode Material Processing
- ▶ Medical Applications in Aesthetics and Dentistry




Features

- ▶ Wavelength 970 +/- 5 nm
- ▶ Output Power 200 W at 30 Amperes
- ▶ Maximum Pulse Duration 10 ms at 10% Duty Cycle
- ▶ Ultrahigh Brightness from 110 μ m fiber
- ▶ Minimal Cooling Requirements
- ▶ Compact Fiber-Coupled Package



IPG Photonics' line of high peak power fiber-coupled diode lasers are a revolutionary product providing unmatched performance from a compact, single-emitter diode footprint featuring high reliability and minimal cooling requirements. The PLD-212-970-HPP provides an ultra-bright 200 W fiber-coupled power out of a 110 μ m diameter core. The HPP line of IPG diodes reliably sustain high brightness output for pulse durations up to 10 milliseconds at duty cycles as high as 10%.

At IPG, we manufacture to rigorous telecom-grade standards in the world's largest high power diode fab. Each die is individually qualified, which sets IPG apart from alternative industrial pump products using short-lived diode bars and bar-stack technologies.

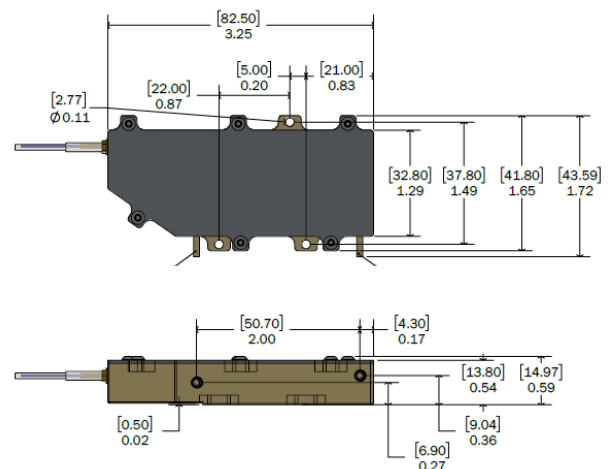

PLD-212-HPP: 970 nm, 200 W

High Peak Power Fiber-coupled Diode Lasers

Optical and Electrical Characteristics*	PLD-212-HPP
Center Wavelength, nm	970
Center Wavelength Tolerance, nm	5
Maximum Peak Output Power, W	200
Maximum Pulse Duration, ms	10
Maximum Duty Cycle in Pulsed Mode, %	10
Threshold Current (I_{TH}), A	1
Operating Current (I_{OP}), A	30
Forward Voltage, V	<15
Recommended Case Temperature, °C	25

* Output performance measured at 30 A, 25°C, 10 ms, 10% duty cycle.


Fiber Characteristics	
Fiber Core Diameter, μm	110
Fiber Cladding Diameter, μm	125
Fiber Buffer Diameter, μm	250
Beam Numerical Aperture (90% power)	<0.2
Fiber Length, m	1.9
Minimum Fiber Bend Radius, mm	30

Maximum Ratings	
Operating Current (I_{OP}), A	30
Reverse Voltage, V	5
Case Temperature, °C	5 - 70
Storage Temperature, °C	-20 to 60
Lead Soldering Temperature (10 s max) °C	300
Relative Humidity, %	85

+1 (508) 373-1100; sales.us@ipgphotonics.com
 +49 2736 44200; sales.europe@ipgphotonics.com (European Inquiries)

www.ipgphotonics.com

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2020 IPG Photonics Corporation. All rights reserved.



The Power to Transform®