


YLPN-100-25x100-1000-S

Ultra High Power Nanosecond Fiber Laser

NEW PRODUCT

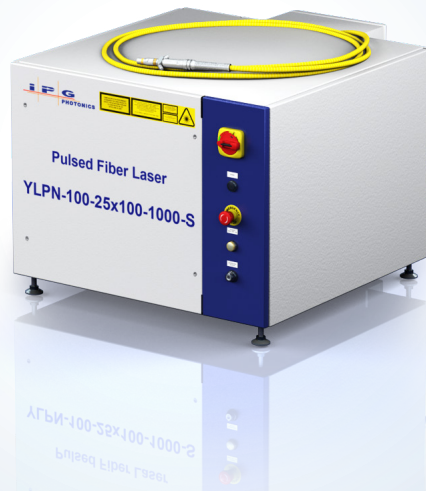

Applications

- ▶ Paint Stripping
- ▶ Coating removal
- ▶ Surface Treatment
- ▶ Texturing



Features

- ▶ Average Power 100-1000 W
- ▶ Adjustable Pulse Duration
- ▶ Round or Square Fiber Core
- ▶ Repetition Rate up to 50 kHz
- ▶ Rugged Design

IPG Photonics' YLPN-HP Nanosecond Fiber Laser offers variable pulse durations in 25-100 nanosecond range. The laser power can be adjusted in a wide range of pulse repetition rates independent of the pulse energy. Average output powers vary from 100 W to 1 kW and the repetition rates vary from 2 to 50 kHz. Housed in rugged sealed cabinets, these compact efficient maintenance-free systems are designed to operate in harsh industrial manufacturing environments. Powerful YLPN-HP lasers are optimized for high throughput surface treatment applications such as paint stripping, coating removal, surface cleaning and texturing.

YLPN-100-25x100-1000-S

Ultra High Power Nanosecond Fiber Laser

Optical Characteristics

Wavelength, nm	1064
Mode of Operation	Pulsed
Max. Average Power, W	1000
Power Tunability, %	10-100
Preset Pulse Duration Modes, ns	25, 50, 70, 100
Repetition Rate, kHz	2-50
Process Fiber Core Options	Round or Square
Process Fiber Core Diameter, μm	600
Beam Parameter Product, mm x mrad	30 Round Core; 45 Square Core

General Characteristics

Control Unit Dimensions, mm	780 x 806 x 558
Weight, kg	160
Connector Type	HLC-8, QBH Compatible
Control Unit Cooling	Water-cooled
Chiller Cooling Capacity, kW	3
Supply Voltage, 3-phase, 50-60 Hz, VAC	400-480
Power Consumption, kW	<4

+1 (508) 373-1100; sales.us@ipgphotonics.com

+49 2736 44200; sales.europe@ipgphotonics.com (all European Inquiries)

www.ipgphotonics.com

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2015-16 IPG Photonics Corporation. All rights reserved.

