


YLS-CL Series

Ytterbium Cladding Fiber Laser

NEW PRODUCT

 Applications

- ▶ Cladding
- ▶ Hardening
- ▶ Welding
- ▶ Surface Treatment

 Features

- ▶ Fiber Delivery 600, 800 or 1000 μm
- ▶ Hot Redundancy
- ▶ Modulation up to 5 kHz
- ▶ Wall-plug Efficiency >40%
- ▶ Maintenance-free Operation
- ▶ Record Reliability
- ▶ Compact, Rugged Design



IPG introduces its new Cladding (CL) Series of fiber lasers specifically targeting cladding, welding, hardening and surface treatment applications. IPG's CL Series has a wall plug efficiency of over 40%, resulting in the lowest electricity cost of any other industrial laser on the market. The laser is extremely compact (8 kW in 0.7 m^3 enclosure) and is housed in a hermetically sealed cabinet with built-in dryer; harsh production environments can be handled by the robust maintenance-free laser. IPG's fiber lasers are built with hot diode redundancy providing better reliability than any other laser on the market. Our lasers offer a wide range in output power capability (4-10 kW), chiller capability, different interface configurations and plug and play fiber delivery with interchangeable process fibers available in either square or round diameters up to 1 mm. IPG is ready to provide you with a total solution.

YLS-CL Series


Ytterbium Cladding Fiber Laser

Optical Characteristics

Wavelength, nm	1070 ± 5
Mode of Operation	CW/ Modulated
Modulation Frequency, kHz	0-5
Max. Average Power, kW	4, 6, 8, 10
Power Tunability, %	10 - 100
Power Stability, %	±1
Output Fiber Core Diameter, μm	600, 800, 1000
Beam Parameter Product (Feed Fiber), mm x mrad	<25, <35, <45

General Characteristics


Cabinet Dimensions (W x D x H), mm	815 x 806 x 1005
Weight, kg	270-420
Supply Voltage, VAC	400-460 3-phase, 50/60 Hz
Wall-plug Efficiency, %	40

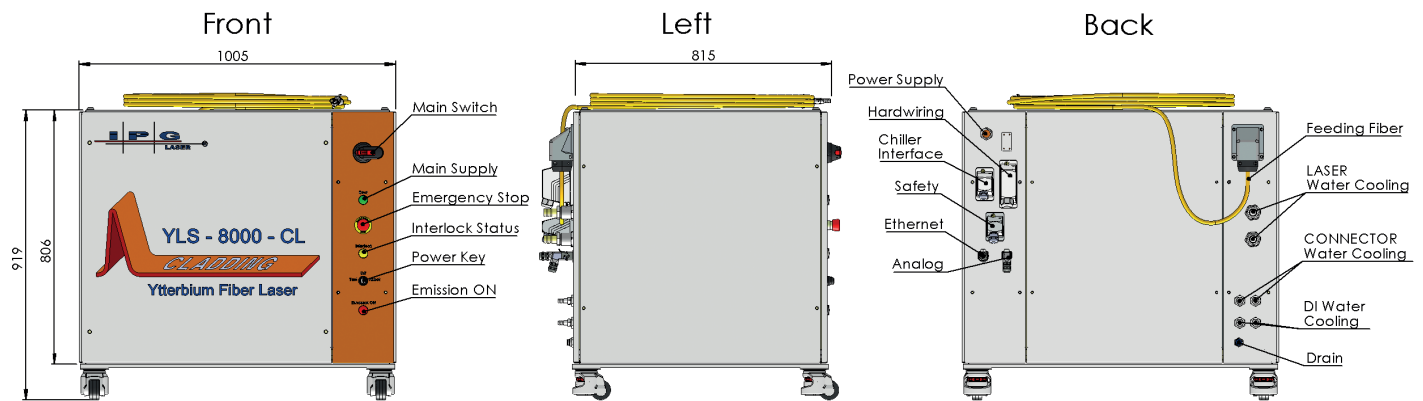

+1 (508) 373-1100; sales.us@ipgphotonics.com
 +49 2736 44200; sales.europe@ipgphotonics.com (all European Inquiries)

www.ipgphotonics.com

Legal notices: All product information is believed to be accurate and is subject to change without notice. Information contained herein shall legally bind IPG only if it is specifically incorporated into the terms and conditions of a sales agreement. Some specific combinations of options may not be available. The user assumes all risks and liability whatsoever in connection with use of a product or its application. IPG, IPG Photonics, The Power to Transform and IPG Photonics' logo are trademarks of IPG Photonics Corporation. © 2016 IPG Photonics Corporation. All rights reserved.



The Power to Transform®